

CORRECTIONS CARRIERS

Our advanced body armor systems are specifically designed to help protect Corrections officers against spikes, shanks and other potentially lethal weapons typically found in corrections facilities. In response to the ever volatile conditions and unique threats Corrections professionals face each day, our body armor systems provide the superior puncture and slash resistant protection needed for optimal performance. Tested and certified by NIJ, our body armor systems provide exceptional torso, bicep, neck and groin protection against ice picks and other sharp edged, pointed weapons. We offer high performance stab packages in (Spike 1, 2 or 3), optional Edge Weapon Level III protection, as well as combo packages that offer ballistic and spike protection.




PROTECTION AGAINST STAB THREATS

Body armor that is ballistic resistant does not necessarily make it stab or puncture resistant (and vice versa). Sharp edged and hand made instruments with pointed tips such as spikes, awls or shanks generally do not need to tear the fabric to penetrate – it merely moves the fibers aside. Point Blank utilizes a combination of super fine, ultra-dense materials, which prevent pointed objects from spreading or moving the individual yarns to stop penetration/puncture.



COMPLIANT

* Exceeds NIJ, DEA and FBI Testing Requirements.

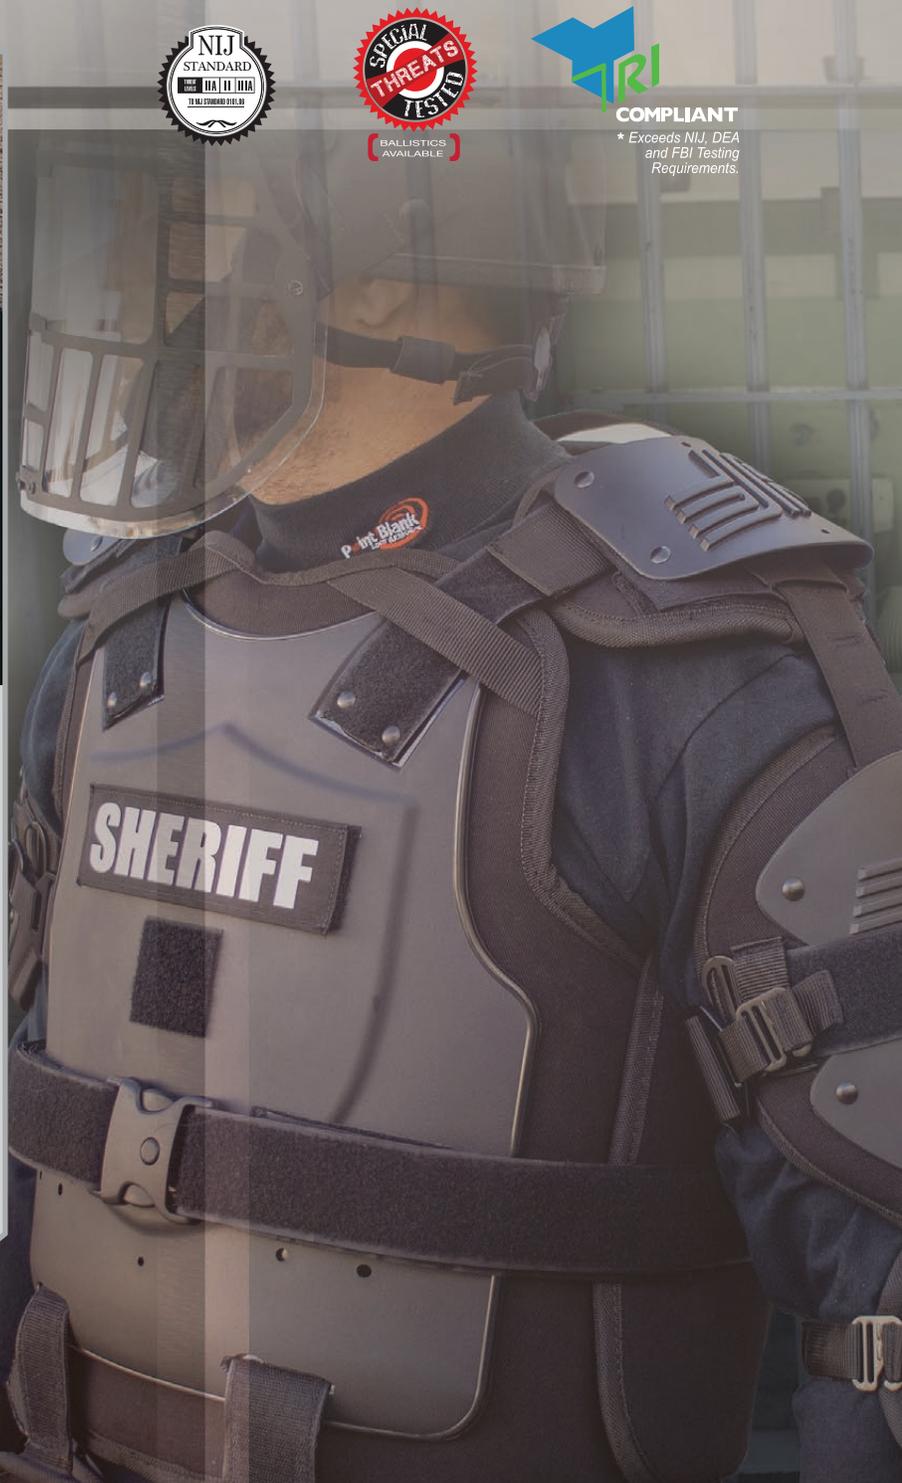



NIJ 0115.00 Standard for Stab Resistance



The NIJ rates body armor on resistance to hand-delivered stab threats – the NIJ 0115.00 Standard. Maximum penetration of 0.28”/7mm is allowed as serious injury is extremely unlikely with such a shallow wound. Also an “Over-test” is applied, to push the breaking point of the armor, where 0.79” / 20mm of penetration is allowed. Ice-pick or improvised “Spike” weapons testing is regularly conducted by Point Blank through its independent laboratories.

Spike Systems

Model	Level	Weight	Thickness
S1-1	1	0.51 psf	0.17”
S2-3	2	0.63 psf	0.17”
S3-2	3	0.81 psf	0.20”

Combo System

Model	CB-S3-BIIA-1
Level	NIJ IIA/ Spike 3
Weight	0.97
Thickness	0.25”
V50 9mm	1613
V50 .40 Cal	1616

Combo System

Model	CB-S2-BII-1
Level	NIJ II/ Spike 2
Weight	1.02
Thickness	0.25”
V50 9mm	1787
V50 .357 Mag	1710

Combo System

Model	CB-S3-BIIIA-3
Level	NIJ IIIA/ Spike 3
Weight	1.27
Thickness	0.35”
V50 .357 Sig	1912
V50 44 Mag	1782

CORRECTIONS

